

GEMINI



ACTIVE INFRARED MINI BARRIER WITH DOUBLE LENS Maximum range 100 m

GEMINI is the mini active infrared barrier with 2 lenses with very small dimensions. It composed of a transmitter and a receiver unit with 8 selectable digital frequencies.

It can be installed on a pole, wall or in combination with the boxes / housings of our TOWER columns.



It is safe, easy to install, does not require any wire synchronism and is offered at a really unrivalled price/quality ratio.

Available in three versions GEMINI 30, GEMINI 60 and GEMINI 100 has a maximum range of 100 m (GEMINI 100) and a minimum of 15 m (GEMINI 30).

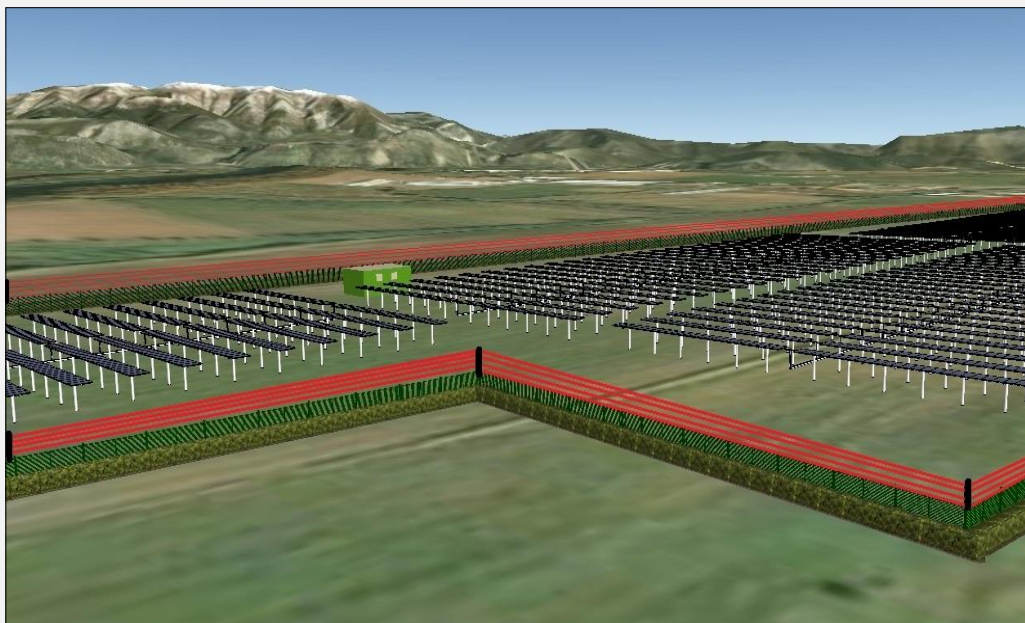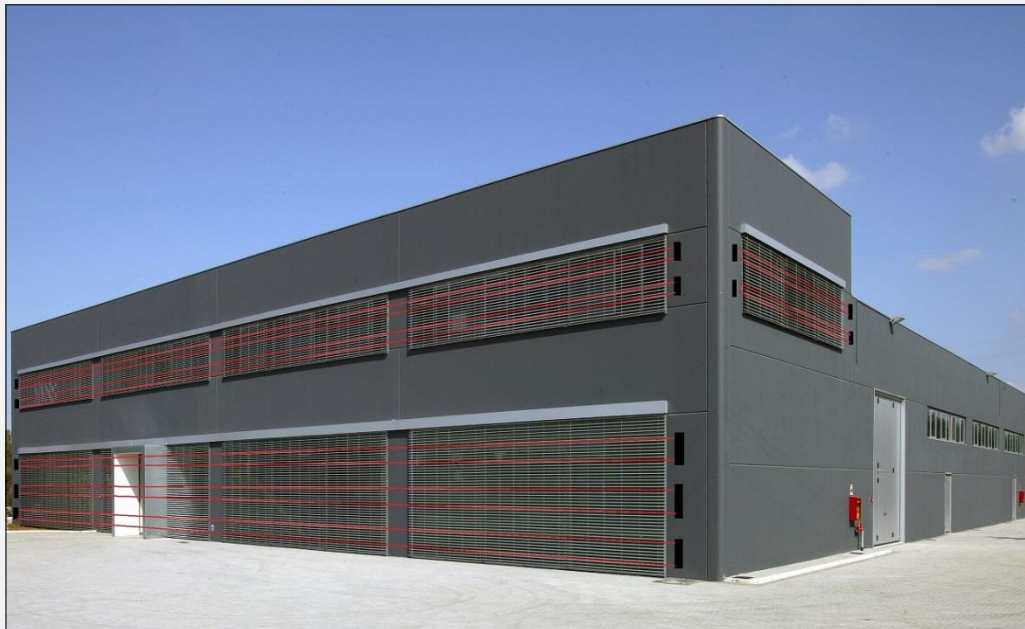

RX PROFILE

TX PROFILE



CARATTERISTICHE TECNICHE

Outdoor range	GEMINI 100: max. 100 m – min. 50 m GEMINI 60: max. 60 m – min. 30 m GEMINI 30: max. 30 m – min. 15 m
Dimensions	170 x 80 x 80 mm
Synchronization	Optical, aligning with the viewfinder and led signal
Power supply	From 12 to 24 Vdc - Maximum absorption: 100 mA (RX+TX)
Vertical alignment angle	20° (+/- 10°)
Horizontal alignment angle	180° (+/- 90°)
Operating temperature	-25°C + 55°C
Allarm output	Relé NO-NC
Alarm signal threshold	0,5 Volt
Acoustic signal	Buzzer alarm and status during programming
Tempo di risposta	Adjustable
Standard compliance	EN 50131-1 e CEI 79-3
Rohs compliance	2011/65/UE
Protection class	IP55
Standard accessories	Pole and wall mounting brackets
Warranty	3 anni

GEMINI IN COMBINATION WITH EMPTY TOWER BOX COLUMNS



MITECH® srl

Offices:
Via Roncaglia, 14
20146 Milano – Italy

Production:
Via Ramazzone, 23
43010 Fontevivo (PR) – Italy

Phone: +39 02.48006383
Fax: +39 02.48025620
tech@mitech-security.com



www.mitech-security.com