

# TWIN WS DT DATASHEET


**SELF-POWERED DUAL TECHNOLOGY (2 PIR + 1 MW) CURTAIN SENSOR WITH DOUBLE MASKING**  
 Compatible with any radio transmitter, available in white or brown colour

TWIN WS DT is the dual technology sensor powered by a lithium battery which is compatible with any radio transmitter that can be installed inside (9 x 3.5 cm). Weather resistant, it is ideal for protecting small spaces including the interspace between doors and windows, rolling blinds and shutters.



## TECHNICAL FEATURES

Detection: 2 PIR + 1 MW (sensitivity adjustment and ON/OFF selection by dip-switch)
Maximum range: 4 m
Power supply: 1 lithium battery 3.6 Vdc - 2700 mAh - 3 years endurance <b>IMPORTANT: the battery endurance refers to max. 10 alarms per day with the radio transmitter powered by its own battery.</b>
Consumption: 60 µA - 20 mA in alarm
Tamper: Internal contact and accelerometer
Double masking (ON/OFF by dip-switch)
Horizontal detection angle: 35°
Operating temperature: From -20°C up to +50°C (humidity 85%)
Number of pulses: 1 or 2 in 2,5 s
ON/OFF led by dip-switch
Temperature automatic compensation
4 detection areas
Tropicalized card
Dimensions: 280 x 40 x 26 mm – Weight: 160 gr
Standard compliance: EN 50131-1 and CEI 79-3
Rohs compliance: 2011/65/UE
Protection class: IP54
Warranty: 3 years

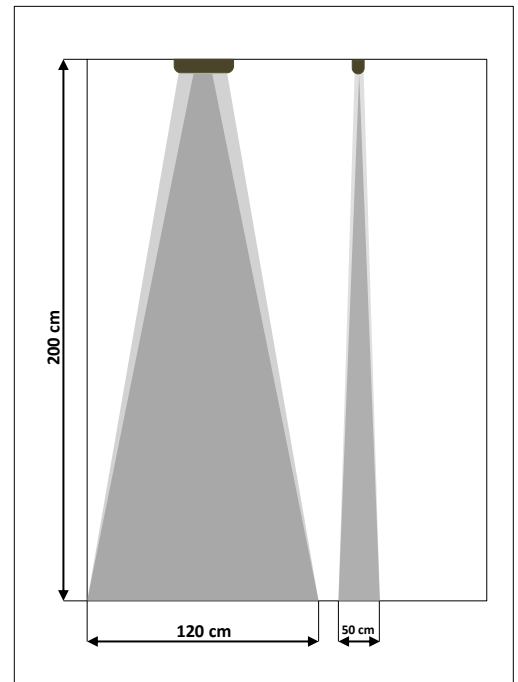

## MITECH® srl

**Offices:**  
 Via Roncaglia, 14  
 20146 Milano – Italy


**Production:**  
 Via Ramazzone, 23  
 43010 Fontevivo (PR) – Italy

Phone: +39 02.48006383  
 Fax: +39 02.48025620  
 tech@mitech-security.com



[www.mitech-security.com](http://www.mitech-security.com)

Rev. 1 – 03-2019



  
 MADE IN ITALY

